

# RF 6

## RIGID AND FLEXIBLE PROFESSIONAL LOUDSPEAKERS

RF 6 is a compact yet powerful two-way installation loudspeaker from the RF series, built for high-output performance and audio clarity in fixed installations. It features a rigid birch plywood cabinet with integrated suspension points for easy wall, ceiling, or hanging installation. Optional mounting brackets support both horizontal and vertical orientation, with a universal bracket also available. The speaker is equipped with dual input connectors speakON and Phoenix for flexible and secure wiring.




Technical Specifications	RF 6
Type	Full range two-way loudspeaker
Impedance	8 Ω
Rated power	150 W RMS, 300 W peak
Sensitivity	97 dB (1W / 1m)
Maximum SPL	123 dB
Frequency response	75 Hz - 19 kHz (-5 dB)
Driver dimensions	6.5" (165 mm) woofer, 1" (25 mm) tweeter
Crossover point	2.2 kHz
Dispersion	75° (H) x 55° (V)
Dimensions (L x W x H)	215 mm x 200 mm x 405 mm
Weight	9 kg
Mounting options	Rigging points, optional mounting brackets: RF H6B (horizontal), RF V6B (vertical), RF UB universal angle
Grill material	Cabinet – birch plywood with texture coating, grill – powder coated steel
Colour	Black




# RF 6

## RIGID AND FLEXIBLE PROFESSIONAL LOUDSPEAKERS


Frequency response

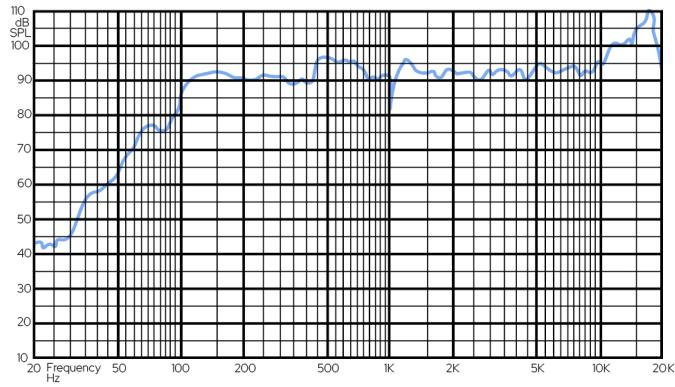

Impedance

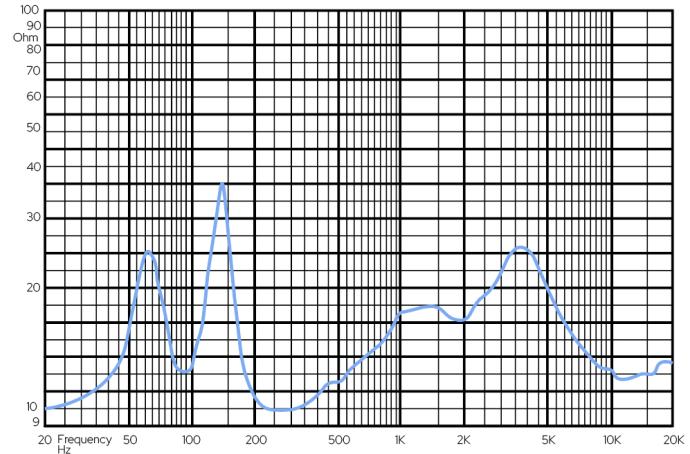

Dimensions

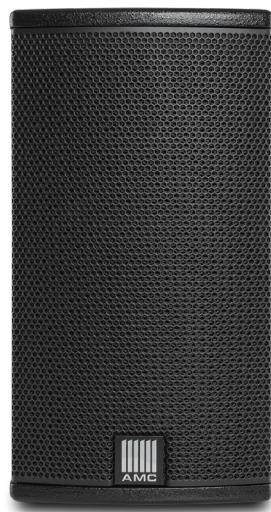

215 mm



200 mm

405 mm

