


# Function description of gooseneck microphone table stand Talk St

## INPUT CONNECTOR

3 pin XLR connector. Designed to connect dynamic or condenser type gooseneck microphone.

## OUTPUT CONNECTOR

Designed to connect Talk St to a mixing amplifier or preamplifier by using 3 pin XLR audio cable.

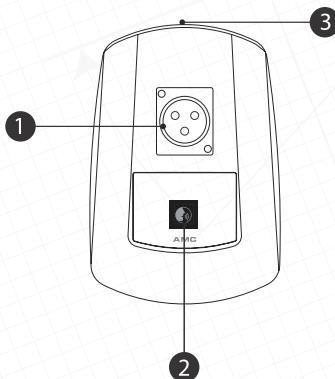

1. Input connector
2. Microphone push-to-talk or on-off button
3. Output connector

## PUSH-TO-TALK BUTTON (Talk St push-to-talk version)

Noise free on/off button without fixation. Press and hold button to turn microphone on.

## ON / OFF BUTTON (Talk St on-off version)

Noise free on/off switch with fixation. Press button to turn microphone on and off.

## CIRCUIT DIAGRAM

