


100 ICS6-T UL

Product Data Sheet

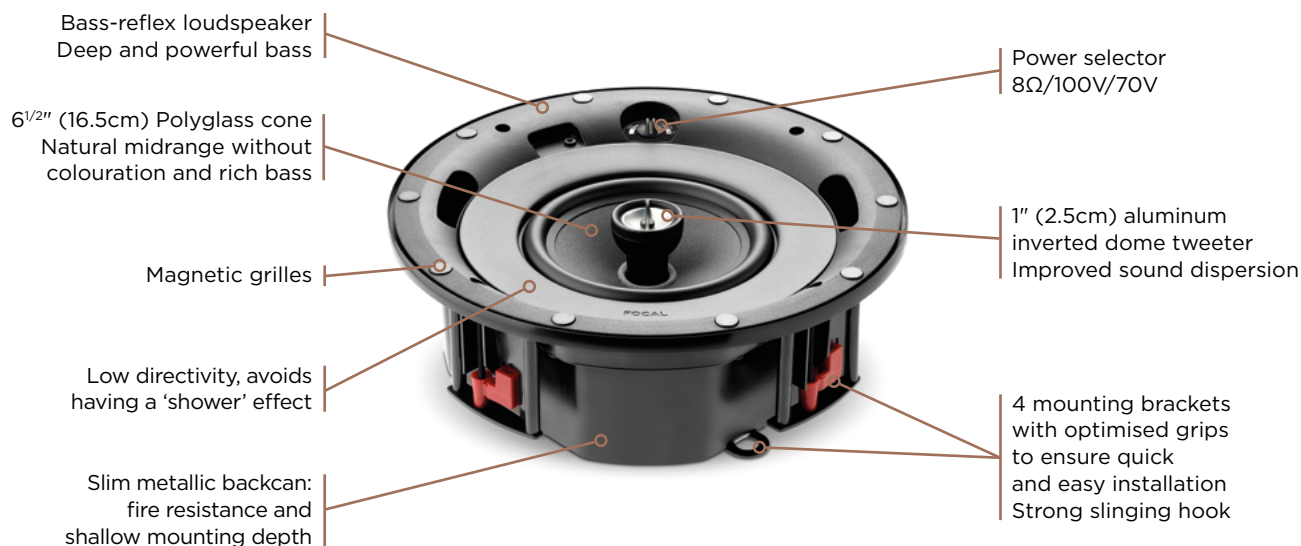

Key points

- Product designed and developed in France by Focal
- Compact design with low depth from wall
- 8Ω or 100V/70V mode by switch
- Low directivity: wide sound dispersion
- UL 1480, UL 2043 certifications for fire protective signaling systems and for fire resistance
- Optional suspended ceiling mounting kit available

Specifications

Type	In-ceiling - 2-way coaxial bass-reflex 100V/70V or 8 Ω installations - Steel back can
Drivers	6 1/2" (16.5cm) Polyglass Midbass 1" (2.5cm) Al inverted dome Tweeter
Sensitivity (2.83V/1m)	89dB
Frequency response (±3dB)	70Hz-23kHz
Low frequency point (-6dB)	60Hz
70V line power	4/8/15W
100V line power	8/15/30W
8Ω Recommended amplifier power	15-100W
External dimensions (Ø x Depth)	11 3/4" x 5 1/16" (29.7 x 12.9cm)
Cut-out diameter	10 3/8" (26.5cm)
Depth from wall	4" (10.3cm)
Ceiling thickness	0-1 3/8" (0-3.6cm)
Net weight (with grille)	8.26lbs (3.75kg)
Packing dimensions	14 5/8" x 14 5/8" x 6 3/4" (37.5 x 37.5 x 17.2cm)
Total weight (with packaging)	10.8lbs (4.9kg)

Selectable power table

8 Ω	-	-	-
70V	4W	8W	15W
100V	8W	15W	30W



