
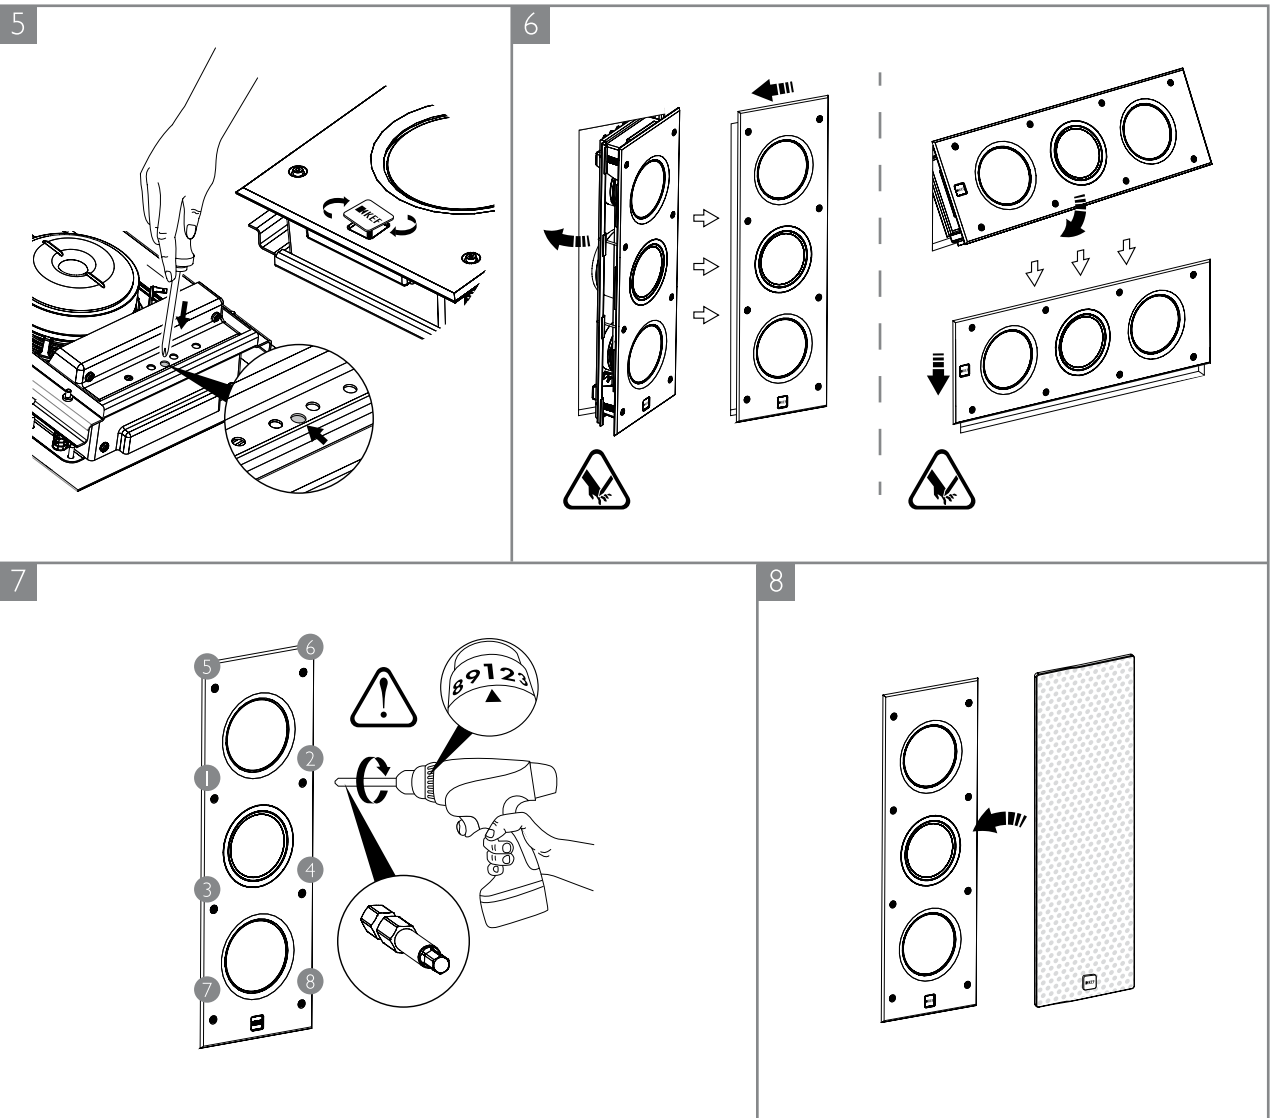



Installation

F Installation D Installation ES Instalación JP 取り付け CN 安装程序

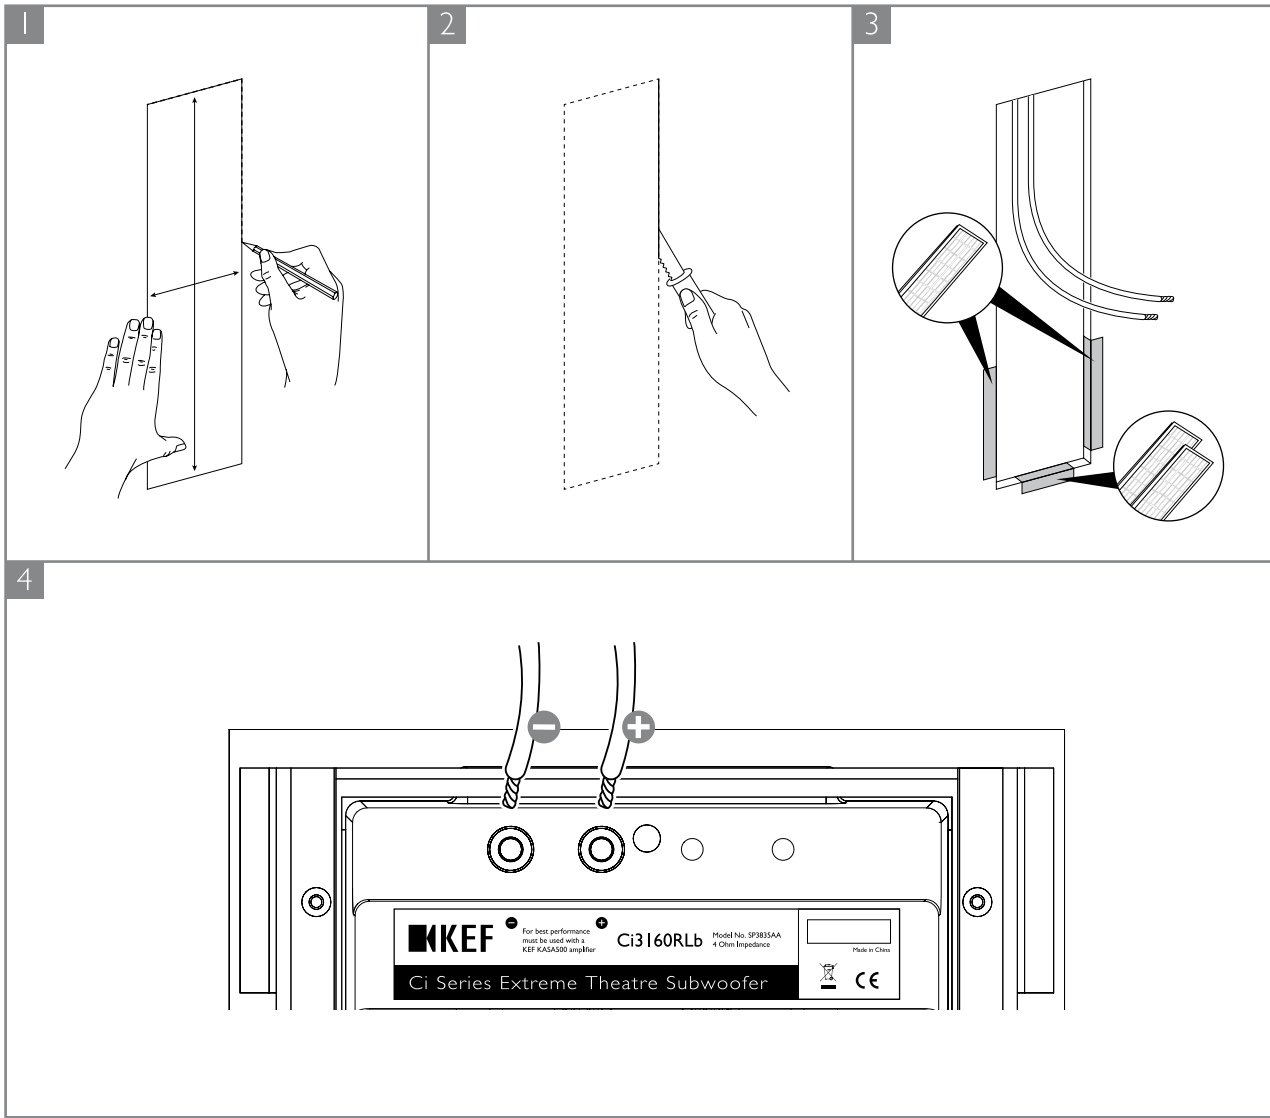

Decoration

F Finition D Dekoration ES Ornamentación JP 装飾 CN 装饰

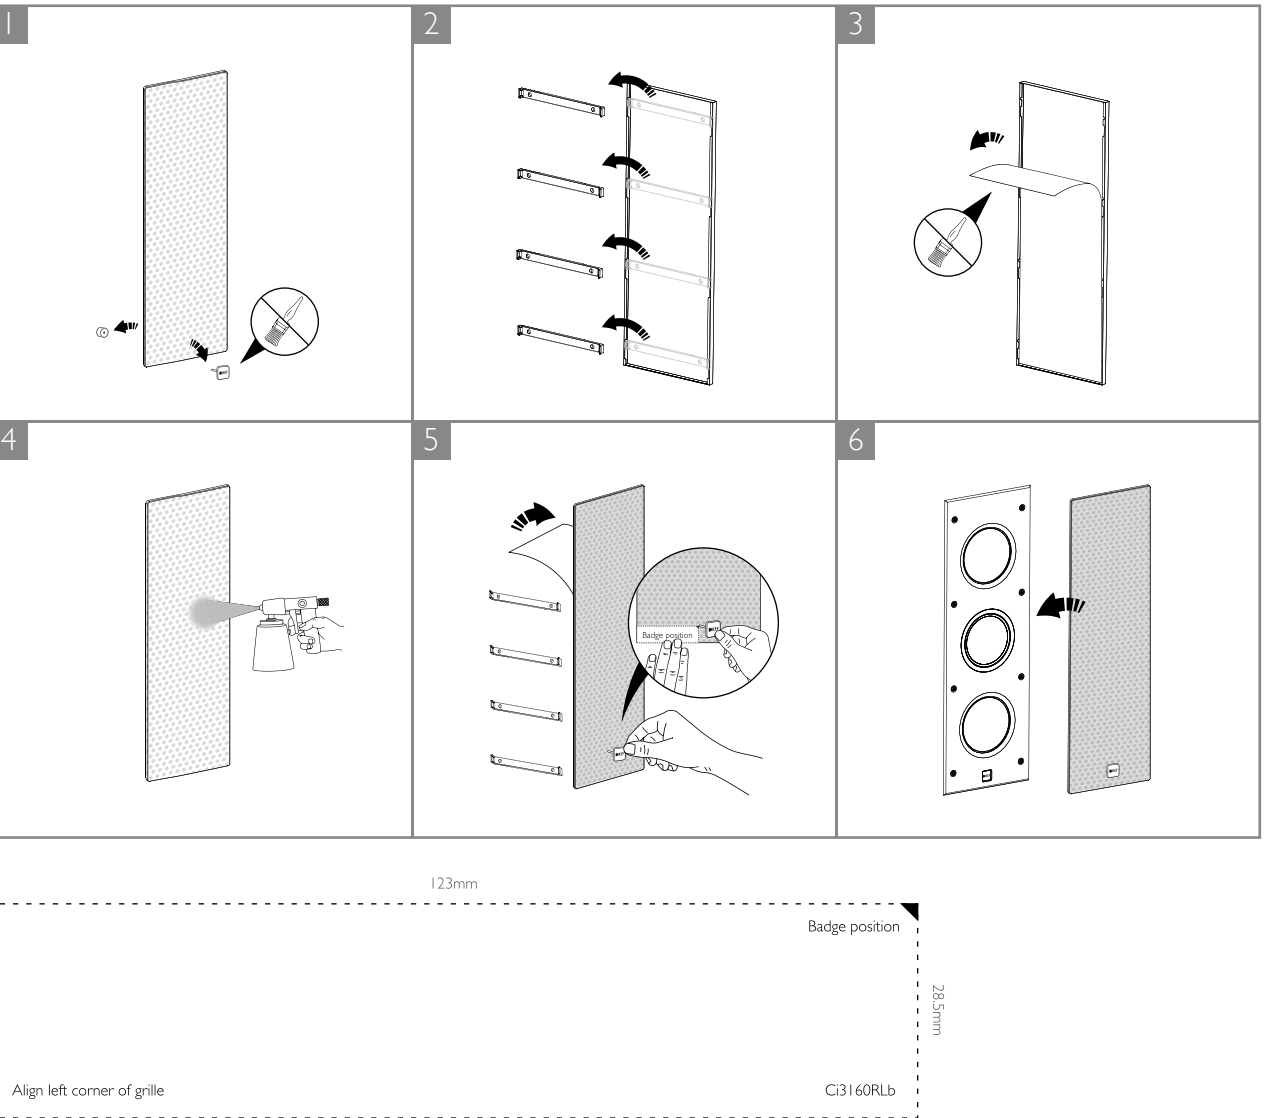

Specifications

F Spécifications D Einleitung ES Especificaciones JP 仕様 CN 产品规格

	
Model	Ci3160RLb
Series	Reference Series
Nominal impedance	4Ω
Sensitivity (2.83V/1m)	92dB
Frequency response (±6dB) open-backed	28Hz - 100kHz
Crossover frequency	-
Drive units	LF
Recommended amplifier	KASA500
Product external dimensions (H x W x D)	680 x 230 x 96 mm (26.77 x 9.06 x 3.78 in.)
Cut-out dimensions (H x W)	660 x 209 mm (25.98 x 8.23 in.)
Net weight	10kg (22.04lbs.)
Mounting depth from surface	88.5mm (3.84in.)
Optional rough in frame	RIF3160L
Optional rear enclosure	None

KEF reserves the right, in line with continuing research and development, to amend or change specifications. E&OE.



Ci Series
Installation Manual

Ci3160RLb

F Manuel d'installati on D Installationshandbuch ES Manual de instalação JP 取付説明書 CN 安装手册

